

REC'D 16 APR 2002

WIPO PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

|  |   |   |
|--|---|---|
| Applicant's or agent's file reference<br>FINE25(P)   | <b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416) |   |
| International application No.<br><b>PCT/KR99/00797</b>   | International filing date (day/month/year)<br>21 DECEMBER 1999 (21.12.1999)   | Priority date (day/month/year)<br>22 DECEMBER 1998 (22.12.1998) |
| International Patent Classification (IPC) or national classification and IPC<br><b>IPC7 H01M 10/36</b> |   |   |
| Applicant<br>FINECELL Co., Ltd. et al  |   |   |

**CORRECTED VERSION**

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 4 sheets, including this cover sheet.

☒ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 2 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☒ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

|   |  |
|---|--|
| Date of submission of the demand<br><br>03 APRIL 2000 (03.04.2000)  | Date of completion of this report<br><br>13 APRIL 2001 (13.04.2001)        |
| Name and mailing address of the IPEA/KR<br>Korean Intellectual Property Office<br>Government Complex-Taejon, Dunsan-dong, So-ku, Taejon<br>Metropolitan City 302-701, Republic of Korea<br>Facsimile No. 82-42-472-7140 | Authorized officer<br><br>KWON, Oh Bok<br><br>Telephone No. 82-42-481-5994 |



**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/KR99/00797

## I. Basis of the report

### 1. With regard to the elements of the international application:\*

- ☐ the international application as originally filed
- ☒ the description:  
 pages 1 - 29 , as originally filed  
 pages \_\_\_\_\_ , filed with the demand  
 pages \_\_\_\_\_ , filed with the letter of \_\_\_\_\_
- ☒ the claims:  
 pages 30 - 32 , as originally filed  
 pages \_\_\_\_\_ , as amended (together with any statement) under Article 19  
 pages \_\_\_\_\_ , filed with the demand  
 pages \_\_\_\_\_ , filed with the letter of \_\_\_\_\_
- ☒ the drawings:  
 pages \_\_\_\_\_ , as originally filed  
 pages 1/2 - 2/2 , filed with the demand  
 pages \_\_\_\_\_ , filed with the letter of \_\_\_\_\_
- ☒ the sequence listing part of the description:  
 pages None , as originally filed  
 pages None , filed with the demand  
 pages None , filed with the letter of \_\_\_\_\_

### 2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language English which is

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☒ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

### 3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

### 4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages \_\_\_\_\_
- ☐ the claims, Nos. \_\_\_\_\_
- ☐ the drawings, sheet \_\_\_\_\_

### 5. ☐ This opinion has been drawn as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed." and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item I and annexed to this report.

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/KR99/00797

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

|                               |        |     |     |
|-------------------------------|--------|-----|-----|
| Novelty (N)                   | Claims | 1-5 | YES |
|                               | Claims |     | NO  |
| Inventive step (IS)           | Claims | 1-5 | YES |
|                               | Claims |     | NO  |
| Industrial applicability (IA) | Claims | 1-5 | YES |
|                               | Claims |     | NO  |

### 2. Citations and explanations (Rule 70.7)

Reference is made to the following documents :

D1 : US-A-5079109

D2 : 'Development of Film-like Lithium Battery Using Solid Polymer Electrolyte' In : Telecommunications Energy Conference, 1995

1. D1 discloses a nonaqueous electrolyte prepared by dissolving an electrolytic salt in a solvent mixture consisting of ethylene carbonate, 2-methyletrahydrofuran, and subjected to a treatment of bringing said composition in contact with an insoluble absorbent, but does not disclose a polymer binder. D2 discloses the feature of film-like lithium battery using solid polymer electrolyte, but does not disclose an absorbent in power form, a polymer binder and an ion conductive liquid electrolyte.

Accordingly the subject-matter of claims 1-2 and 5 seems to be novel(Article 33(2) PCT).

2. The closest state of the art appears to be represented by D1.

Neither D1 nor D2 suggest polymer binder.

Thus claims 1-2 and 5 also involve an inventive step and meet the requirement of Article 33(3) PCT.

3. Claims 3-4 also comply with Article 33(2) and (3) PCT as they are dependent claims.

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/KR99/00797

## VI. Certain documents cited

### 1. Certain published documents (Rule 70.10)

| Application No.<br>Patent No. | Publication date<br>(day/month/year) | Filing date<br>(day/month/year) | Priority date (valid claim)<br>(day/month/year) |
|-------------------------------|--------------------------------------|---------------------------------|---|
| US-A-5079109                  | 07/01/92                             | 15/05/90                        | 16/05/89  |

### 2. Non-written disclosures (Rule 70.9)

| Kind of non-written disclosure | Date of non-written disclosure<br>(day/month/year) | Date of written disclosure<br>referring to non-written disclosure<br>(day/month/year) |
|--------------------------------|--|---|
| _____                          | _____  | _____   |

**THIS PAGE BLANK (USPTO)**



# DRAWINGS

Fig. 1



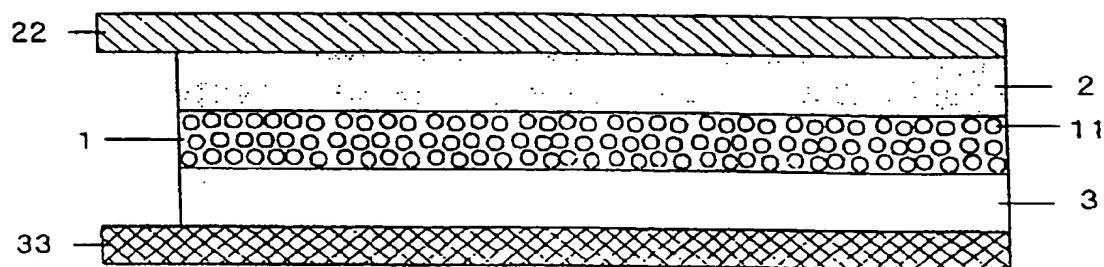


Fig. 2

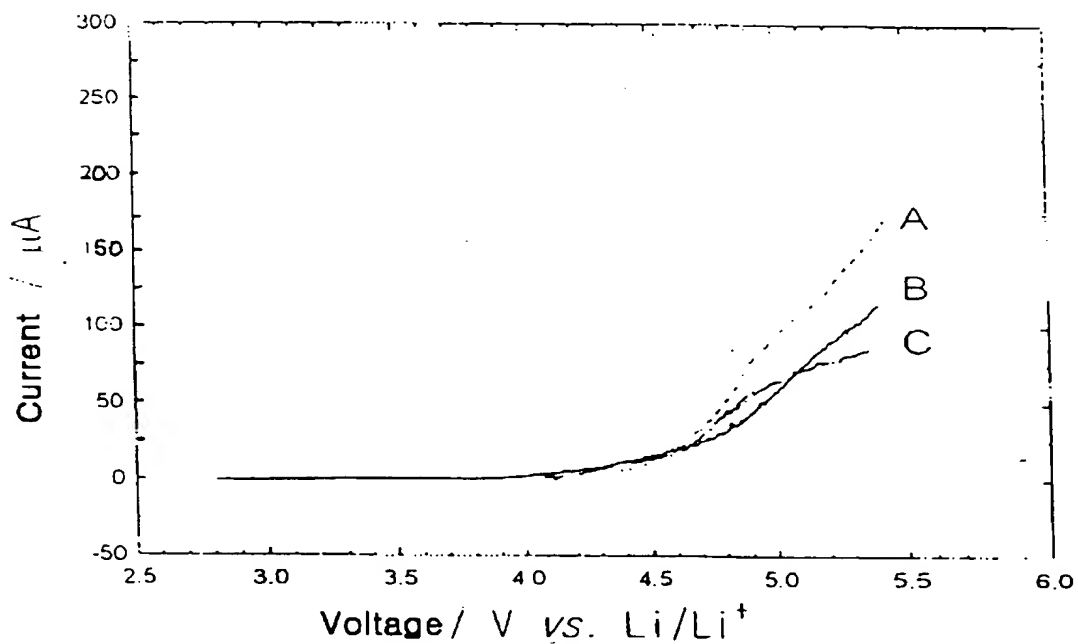

**THIS PAGE BLANK (USPTO)**

Fig. 3

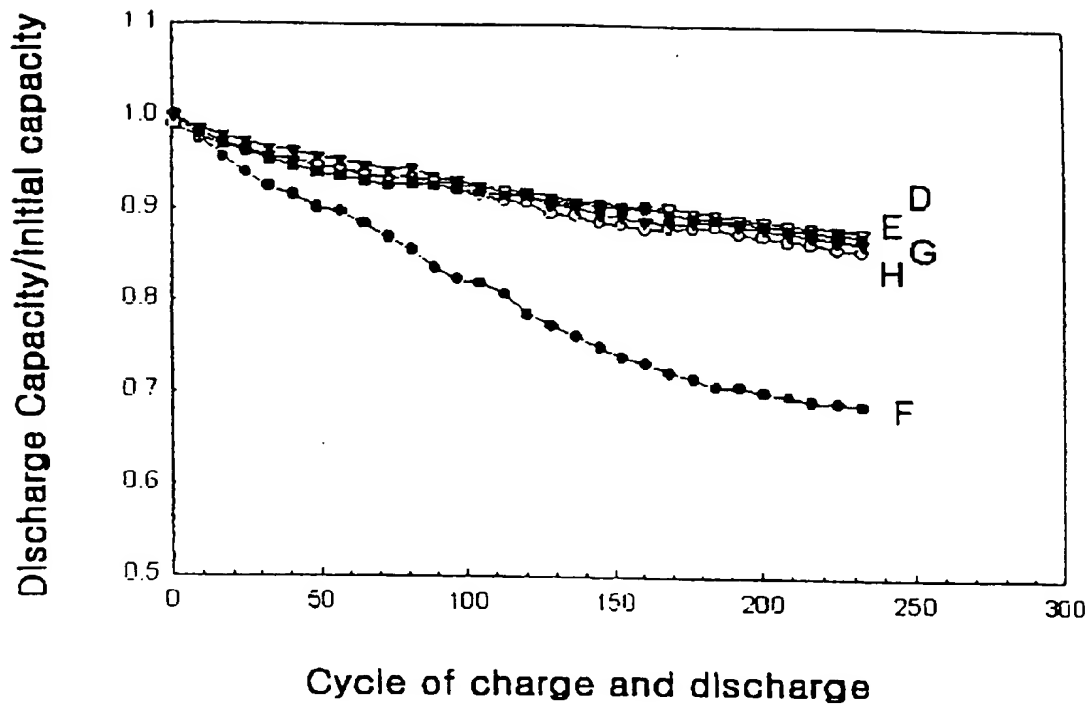

**THIS PAGE BLANK (USPTO)**

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

REC'D 26 APR 2001

WIPO

PCT

|  |   |   |
|--|---|---|
| Applicant's or agent's file reference<br>FINE25(P)   | <b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416) |   |
| International application No.<br><b>PCT/KR99/00797</b>   | International filing date (day/month/year)<br>21 DECEMBER 1999 (21.12.1999)   | Priority date (day/month/year)<br>22 DECEMBER 1998 (22.12.1998) |
| International Patent Classification (IPC) or national classification and IPC<br><br><b>IPC7 H01M 10/36</b> |   |   |
| Applicant<br><br>FINECELL Co., Ltd. et al  |   |   |

|  |  |
|--|--|
| <p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of <u>4</u> sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of _____ sheets.</p>  |  |
| <p>3. This report contains indications relating to the following items:</p> <p>I <input checked="" type="checkbox"/> Basis of the report</p> <p>II <input type="checkbox"/> Priority</p> <p>III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</p> <p>IV <input type="checkbox"/> Lack of unity of invention</p> <p>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability, citations and explanations supporting such statement</p> <p>VI <input checked="" type="checkbox"/> Certain documents cited</p> <p>VII <input type="checkbox"/> Certain defects in the international application</p> <p>VIII <input type="checkbox"/> Certain observations on the international application</p> |  |

|   |  |
|---|--|
| Date of submission of the demand<br><br>03 APRIL 2000 (03.04.2000)  | Date of completion of this report<br><br>13 APRIL 2001 (13.04.2001)        |
| Name and mailing address of the IPEA/KR<br>Korean Intellectual Property Office<br>Government Complex-Taejon, Dunsan-dong, So-ku, Taejon<br>Metropolitan City 302-701, Republic of Korea<br>Facsimile No. 82-42-472-7140 | Authorized officer<br><br>KWON, Oh Bok<br><br>Telephone No. 82-42-481-5994 |

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/KR99/00797

## I. Basis of the report

### 1. With regard to the elements of the international application:\*

- ☒ the international application as originally filed
- ☐ the description:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_
- ☐ the claims:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, as amended (together with any statement) under Article 19  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_
- ☐ the drawings:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_
- ☐ the sequence listing part of the description:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_

### 2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language English which is

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☒ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

### 3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

### 4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages \_\_\_\_\_
- ☐ the claims, Nos. \_\_\_\_\_
- ☐ the drawings, sheet \_\_\_\_\_

### 5. ☐ This opinion has been drawn as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed." and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item I and annexed to this report.

**THIS PAGE BLANK (USPTO)**



# INTERNATIONAL PRELIMINARY EXAMINATION

International application No.

PCT/KR99/00797

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

|                               |            |     |
|-------------------------------|------------|-----|
| Novelty (N)                   | Claims 1-5 | YES |
|                               | Claims     | NO  |
| Inventive step (IS)           | Claims 1-5 | YES |
|                               | Claims     | NO  |
| Industrial applicability (IA) | Claims 1-5 | YES |
|                               | Claims     | NO  |

### 2. Citations and explanations (Rule 70.7)

Reference is made to the following documents :

D1 : US-A-5079109

D2 : 'Development of Film-like Lithium Battery Using Solid Polymer Electrolyte' In : Telecommunications Energy Conference, 1995

1. D1 discloses a nonaqueous electrolyte prepared by dissolving an electrolytic salt in a solvent mixture consisting of ethylene carbonate, 2-methyletrahydrofuran, and subjected to a treatment of bringing said composition in contact with an insoluble absorbent, but does not disclose a polymer binder. D2 discloses the feature of film-like lithium battery using solid polymer electrolyte, but does not disclose an absorbent in power form, a polymer binder and an ion conductive liquid electrolyte.

Accordingly the subject-matter of claims 1-2 and 5 seems to be novel(Article 33(2) PCT).

2. The closest state of the art appears to be represented by D1.

Neither D1 nor D2 suggest polymer binder.

Thus claims 1-2 and 5 also involve an inventive step and meet the requirement of Article 33(3) PCT.

3. Claims 3-4 also comply with Article 33(2) and (3) PCT as they are dependent claims.

**THIS PAGE BLANK (USPTO)**

**INTERNATIONAL PRELIMINARY EXAMINATION**

International application No.

PCT/KR99/00797

**VI. Certain documents cited****1. Certain published documents (Rule 70.10)**

| <u>Application No.<br/>Patent No.</u> | <u>Publication date<br/>(day/month/year)</u> | <u>Filing date<br/>(day/month/year)</u> | <u>Priority date (valid claim)<br/>(day/month/year)</u> |
|---------------------------------------|--|---|---|
| US-A-5079109                          | 07/01/92                                     | 15/05/90                                | 16/05/89  |

**2. Non-written disclosures (Rule 70.9)**

| <u>Kind of non-written disclosure</u> | <u>Date of non-written disclosure<br/>(day/month/year)</u> | <u>Date of written disclosure<br/>referring to non-written disclosure<br/>(day/month/year)</u> |
|---------------------------------------|--|--|
|---------------------------------------|--|--|

**THIS PAGE BLANK (USPTO)**

## PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

SOHN, Chang, Kyu  
401, In-bong Building  
640-21, Yoksam-dong  
Kangnam-gu  
Seoul 135-090  
RÉPUBLIQUE DE CORÉE

|   |   |
|---|---|
| Date of mailing (day/month/year)<br>04 August 2000 (04.08.00) | <b>IMPORTANT NOTIFICATION</b>   |
| Applicant's or agent's file reference<br>FINE25(P)            |   |
| International application No.<br>PCT/KR99/00797               | International filing date (day/month/year)<br>21 December 1999 (21.12.99) |

|  |  |                      |                    |                              |  |                              |  |                 |  |
|--|--|----------------------|--------------------|------------------------------|--|------------------------------|--|-----------------|--|
| 1. The following indications appeared on record concerning:  |  |                      |                    |                              |  |                              |  |                 |  |
| <input type="checkbox"/> the applicant   | <input type="checkbox"/> the inventor <input checked="" type="checkbox"/> the agent <input type="checkbox"/> the common representative   |                      |                    |                              |  |                              |  |                 |  |
| Name and Address<br>SOHN, Chang, Kyu<br>Marine Center Main Building<br>17th Floor<br>118 Namdaemun-ro 2-ka<br>Chung-ku<br>Seoul 100-770<br>Republic of Korea | <table border="1"> <tr> <td>State of Nationality</td> <td>State of Residence</td> </tr> <tr> <td colspan="2">Telephone No.<br/>02 772 4000</td> </tr> <tr> <td colspan="2">Facsimile No.<br/>02 772 4001</td> </tr> <tr> <td colspan="2">Teleprinter No.</td> </tr> </table> | State of Nationality | State of Residence | Telephone No.<br>02 772 4000 |  | Facsimile No.<br>02 772 4001 |  | Teleprinter No. |  |
| State of Nationality   | State of Residence   |                      |                    |                              |  |                              |  |                 |  |
| Telephone No.<br>02 772 4000   |  |                      |                    |                              |  |                              |  |                 |  |
| Facsimile No.<br>02 772 4001   |  |                      |                    |                              |  |                              |  |                 |  |
| Teleprinter No.  |  |                      |                    |                              |  |                              |  |                 |  |
| 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:  |  |                      |                    |                              |  |                              |  |                 |  |
| <input type="checkbox"/> the person  | <input type="checkbox"/> the name <input checked="" type="checkbox"/> the address <input type="checkbox"/> the nationality <input type="checkbox"/> the residence  |                      |                    |                              |  |                              |  |                 |  |
| Name and Address<br>SOHN, Chang, Kyu<br>401, In-bong Building<br>640-21, Yoksam-dong<br>Kangnam-gu<br>Seoul 135-090<br>Republic of Korea                     | <table border="1"> <tr> <td>State of Nationality</td> <td>State of Residence</td> </tr> <tr> <td colspan="2">Telephone No.</td> </tr> <tr> <td colspan="2">Facsimile No.</td> </tr> <tr> <td colspan="2">Teleprinter No.</td> </tr> </table>                                 | State of Nationality | State of Residence | Telephone No.                |  | Facsimile No.                |  | Teleprinter No. |  |
| State of Nationality   | State of Residence   |                      |                    |                              |  |                              |  |                 |  |
| Telephone No.  |  |                      |                    |                              |  |                              |  |                 |  |
| Facsimile No.  |  |                      |                    |                              |  |                              |  |                 |  |
| Teleprinter No.  |  |                      |                    |                              |  |                              |  |                 |  |
| 3. Further observations, if necessary:   |  |                      |                    |                              |  |                              |  |                 |  |
| 4. A copy of this notification has been sent to:   |  |                      |                    |                              |  |                              |  |                 |  |
| <input checked="" type="checkbox"/> the receiving Office   | <input type="checkbox"/> the designated Offices concerned  |                      |                    |                              |  |                              |  |                 |  |
| <input type="checkbox"/> the International Searching Authority   | <input checked="" type="checkbox"/> the elected Offices concerned  |                      |                    |                              |  |                              |  |                 |  |
| <input checked="" type="checkbox"/> the International Preliminary Examining Authority  | <input type="checkbox"/> other:  |                      |                    |                              |  |                              |  |                 |  |

|   |  |
|---|--|
| The International Bureau of WIPO<br>34, chemin des Colombettes<br>1211 Geneva 20, Switzerland<br>Facsimile No.: (41-22) 740.14.35 | Authorized officer<br>Simin Baharlou<br>Telephone No.: (41-22) 338.83.38 |
|---|--|

**THIS PAGE BLANK (USPTO)**

**PCT**

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C. 20231  
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing:

29 June 2000 (29.06.00)

International application No.:

PCT/KR99/00797

Applicant's or agent's file reference:

FINE25(P)

International filing date:

21 December 1999 (21.12.99)

Priority date:

22 December 1998 (22.12.98)

Applicant:

JANG, Dong, Hun et al

1. The designated Office is hereby notified of its election made:



in the demand filed with the International preliminary Examining Authority on:

03 April 2000 (03.04.00)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was



was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer:

J. Zahra

Telephone No.: (41-22) 338.83.38

**THIS PAGE BLANK (USPTO)**



## PATENT COOPERATION TREATY

PCT

NOTIFICATION CONCERNING  
SUBMISSION OR TRANSMITTAL  
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

From the INTERNATIONAL BUREAU

To:

SOHN, Chang, Kyu  
Marine Center Main Building  
17th Floor  
118 Namdaemun-ro 2-ka  
Chung-ku  
Seoul 100-770  
RÉPUBLIQUE DE CORÉE

|  |  |
|--|--|
| Date of mailing (day/month/year)<br>20 February 2000 (20.02.00)      | <b>IMPORTANT NOTIFICATION</b>  |
| Applicant's or agent's file reference<br>FINE25(P)                   |  |
| International application No.<br>PCT/KR99/00797                      |  |
| International publication date (day/month/year)<br>Not yet published |  |
| Applicant<br>FINECELL CO., LTD. et al                                | International filing date (day/month/year)<br>21 December 1999 (21.12.99)<br><br>Priority date (day/month/year)<br>22 December 1998 (22.12.98) |

- The applicant is hereby notified of the date of receipt (except where the letters "NR" appear in the right-hand column) by the International Bureau of the priority document(s) relating to the earlier application(s) indicated below. Unless otherwise indicated by an asterisk appearing next to a date of receipt, or by the letters "NR", in the right-hand column, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
- This updates and replaces any previously issued notification concerning submission or transmittal of priority documents.
- An asterisk (\*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b). In such a case, **the attention of the applicant is directed** to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
- The letters "NR" appearing in the right-hand column denote a priority document which was not received by the International Bureau or which the applicant did not request the receiving Office to prepare and transmit to the International Bureau, as provided by Rule 17.1(a) or (b), respectively. In such a case, **the attention of the applicant is directed** to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

| <u>Priority date</u>   | <u>Priority application No.</u> | <u>Country or regional Office<br/>or PCT receiving Office</u> | <u>Date of receipt<br/>of priority document</u> |
|------------------------|---------------------------------|---|---|
| 22 Dec 1998 (22.12.98) | 1998/57030                      | KR  | 14 Febr 2000 (14.02.00)                         |

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No. (41-22) 740.14.35

Authorized officer

Marc Salzman

Telephone No. (41-22) 338.83.38



**THIS PAGE BLANK (USPTO)**

## PATENT COOPERATION TREATY

PCT

NOTIFICATION OF RECEIPT OF  
RECORD COPY

(PCT Rule 24.2(a))

From the INTERNATIONAL BUREAU

To:

SOHN, Chang, Kyu  
Marine Center Main Building  
17th Floor  
118 Namdaemun-ro 2-ka  
Chung-ku  
Seoul 100-770  
RÉPUBLIQUE DE CORÉE

|  |   |
|--|---|
| Date of mailing (day/month/year)<br>12 January 2000 (12.01.00) | <b>IMPORTANT NOTIFICATION</b>                   |
| Applicant's or agent's file reference<br>FINE25(P)             | International application No.<br>PCT/KR99/00797 |

The applicant is hereby notified that the International Bureau has received the record copy of the international application as detailed below.

Name(s) of the applicant(s) and State(s) for which they are applicants:

FINECELL CO., LTD. (for all designated States except US)  
JANG, Dong, Hun et al (all designated States)  
OH, Seung, Mo (for US)

International filing date : 21 December 1999 (21.12.99)  
Priority date(s) claimed : 22 December 1998 (22.12.98)  
Date of receipt of the record copy  
by the International Bureau : 04 January 2000 (04.01.00)  
List of designated Offices :

EP : AT,BE,CH,CY,DE,DK,ES,FI,FR,GB,GR,IE,IT,LU,MC,NL,PT,SE  
National : CN,JP,US


**ATTENTION**

The applicant should carefully check the data appearing in this Notification. In case of any discrepancy between these data and the indications in the international application, the applicant should immediately inform the International Bureau.

In addition, the applicant's attention is drawn to the information contained in the Annex, relating to:

- ☒ time limits for entry into the national phase  
☒ confirmation of precautionary designations  
☒ requirements regarding priority documents

A copy of this Notification is being sent to the receiving Office and to the International Searching Authority.

|   |  |
|---|--|
| <p>The International Bureau of WIPO<br/>34, chemin des Colombettes<br/>1211 Geneva 20, Switzerland</p> <p>Facsimile No. (41-22) 740.14.35</p> | <p>Authorized officer: <br/>Simin Baharlou</p> <p>Telephone No. (41-22) 338.83.38</p> |
|---|--|

**THIS PAGE BLANK (USPTO)**

## INFORMATION ON TIME LIMITS FOR ENTERING THE NATIONAL PHASE

The applicant is reminded that the "national phase" must be entered before each of the designated Offices indicated in the Notification of Receipt of Record Copy (Form PCT/IB/301) by paying national fees and furnishing translations, as prescribed by the applicable national laws.

The time limit for performing these procedural acts is **20 MONTHS** from the priority date or, for those designated States which the applicant elects in a demand for international preliminary examination or in a later election, **30 MONTHS** from the priority date, provided that the election is made before the expiration of 19 months from the priority date. Some designated (or elected) Offices have fixed time limits which expire even later than 20 or 30 months from the priority date. In other Offices an extension of time or grace period, in some cases upon payment of an additional fee, is available.

In addition to these procedural acts, the applicant may also have to comply with other special requirements applicable in certain Offices. **It is the applicant's responsibility** to ensure that the necessary steps to enter the national phase are taken in a timely fashion. Most designated Offices do not issue reminders to applicants in connection with the entry into the national phase.

**For detailed information about the procedural acts to be performed to enter the national phase before each designated Office, the applicable time limits and possible extensions of time or grace periods, and any other requirements, see the relevant Chapters of Volume II of the PCT Applicant's Guide. Information about the requirements for filing a demand for international preliminary examination is set out in Chapter IX of Volume I of the PCT Applicant's Guide.**

GR and ES became bound by PCT Chapter II on 7 September 1996 and 6 September 1997, respectively, and may, therefore, be elected in a demand or a later election filed on or after 7 September 1996 and 6 September 1997, respectively, regardless of the filing date of the international application. (See second paragraph above.)

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

## CONFIRMATION OF PRECAUTIONARY DESIGNATIONS

This notification lists only specific designations made under Rule 4.9(a) in the request. It is important to check that these designations are correct. Errors in designations can be corrected where precautionary designations have been made under Rule 4.9(b). The applicant is hereby reminded that any precautionary designations may be confirmed according to Rule 4.9(c) before the expiration of 15 months from the priority date. If it is not confirmed, it will automatically be regarded as withdrawn by the applicant. There will be no reminder and no invitation. Confirmation of a designation consists of the filing of a notice specifying the designated State concerned (with an indication of the kind of protection or treatment desired) and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.

## REQUIREMENTS REGARDING PRIORITY DOCUMENTS

For applicants who have not yet complied with the requirements regarding priority documents, the following is recalled.

Where the priority of an earlier national, regional or international application is claimed, the applicant must submit a copy of the said earlier application, certified by the authority with which it was filed ("the priority document") to the receiving Office (which will transmit it to the International Bureau) or directly to the International Bureau, before the expiration of 16 months from the priority date, provided that any such priority document may still be submitted to the International Bureau before that date of international publication of the international application, in which case that document will be considered to have been received by the International Bureau on the last day of the 16-month time limit (Rule 17.1(a)).

Where the priority document is issued by the receiving Office, the applicant may, instead of submitting the priority document, request the receiving Office to prepare and transmit the priority document to the International Bureau. Such request must be made before the expiration of the 16-month time limit and may be subjected by the receiving Office to the payment of a fee (Rule 17.1(b)).

If the priority document concerned is not submitted to the International Bureau or if the request to the receiving Office to prepare and transmit the priority document has not been made (and the corresponding fee, if any, paid) within the applicable time limit indicated under the preceding paragraphs, any designated State may disregard the priority claim, provided that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity to furnish the priority document within a time limit which is reasonable under the circumstances.

Where several priorities are claimed, the priority date to be considered for the purposes of computing the 16-month time limit is the filing date of the earliest application whose priority is claimed.

**THIS PAGE BLANK (USPTO)**

## PATENT COOPERATION TREATY

PCT

INFORMATION CONCERNING ELECTED  
OFFICES NOTIFIED OF THEIR ELECTION

(PCT Rule 61.3)

From the INTERNATIONAL BUREAU

To:

SOHN, Chang, Kyu  
Marine Center Main Building  
17th Floor  
118 Namdaemun-ro 2-ka  
Chung-ku  
Seoul 100-770  
RÉPUBLIQUE DE CORÉE

|   |   |   |  |
|---|---|---|--|
| Date of mailing (day/month/year)<br>29 June 2000 (29.06.00) |   | IMPORTANT INFORMATION   |  |
| Applicant's or agent's file reference<br>FINE25(P)          |   |   |  |
| International application No.<br>PCT/KR99/00797             | International filing date (day/month/year)<br>21 December 1999 (21.12.99) | Priority date (day/month/year)<br>22 December 1998 (22.12.98) |  |
| Applicant<br>FINECELL CO., LTD. et al                       |   |   |  |

1. The applicant is hereby informed that the International Bureau has, according to Article 31(7), notified each of the following Offices of its election:

EP : AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE  
National : CN, JP, US

2. The following Offices have waived the requirement for the notification of their election; the notification will be sent to them by the International Bureau only upon their request:

None

3. The applicant is reminded that he must enter the "national phase" before the expiration of 30 months from the priority date before each of the Offices listed above. This must be done by paying the national fee(s) and furnishing, if prescribed, a translation of the international application (Article 39(1)(a)), as well as, where applicable, by furnishing a translation of any annexes of the international preliminary examination report (Article 36(3)(b) and Rule 74.1).

Some offices have fixed time limits expiring later than the above-mentioned time limit. For detailed information about the applicable time limits and the acts to be performed upon entry into the national phase before a particular Office, see Volume II of the PCT Applicant's Guide.

The entry into the European regional phase is postponed until 31 months from the priority date for all States designated for the purposes of obtaining a European patent.

|  |  |
|--|--|
| The International Bureau of WIPO<br>34, chemin des Colombettes<br>1211 Geneva 20, Switzerland<br><br>Facsimile No. (41-22) 740.14.35 | Authorized officer:<br><br>J. Zahra<br><br>Telephone No. (41-22) 338.83.38 |
|--|--|

**THIS PAGE BLANK (USPTO)**



## PATENT COOPERATION TREATY

PCT

NOTICE INFORMING THE APPLICANT OF THE  
COMMUNICATION OF THE INTERNATIONAL  
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

From the INTERNATIONAL BUREAU

To:

SOHN, Chang, Kyu  
Marine Center Main Building  
17th Floor  
118 Namdaemun-ro 2-ka  
Chung-ku  
Seoul 100-770  
RÉPUBLIQUE DE CORÉE

|   |   |                  |
|---|---|------------------|
| Date of mailing (day/month/year)<br>29 June 2000 (29.06.00)   |   |                  |
| Applicant's or agent's file reference<br>FINE25(P)            |   | IMPORTANT NOTICE |
| International application No.<br>PCT/KR99/00797               | International filing date (day/month/year)<br>21 December 1999 (21.12.99) |                  |
| Priority date (day/month/year)<br>22 December 1998 (22.12.98) |   |                  |
| Applicant<br>FINECELL CO., LTD. et al                         |   |                  |

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:

CN,JP,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

EP

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 29 June 2000 (29.06.00) under No. WO 00/38262

**REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)**

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

**REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))**

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

|   |                                    |
|---|------------------------------------|
| The International Bureau of WIPO<br>34, chemin des Colombettes<br>1211 Geneva 20, Switzerland | Authorized officer<br><br>J. Zahra |
| Facsimile No. (41-22) 740.14.35   | Telephone No. (41-22) 338.83.38    |

**THIS PAGE BLANK (USPTO)**

The demand must be filed directly with the competent International Preliminary Examining Authority or, if two or more Authorities are competent, with the one chosen by the applicant. The full name or two-letter code of that Authority may be indicated by the applicant on the line below

IPEA/ KR

# PCT

## DEMAND

### CHAPTER II

under Article 31 of the Patent Cooperation Treaty:  
The undersigned requests that the international application specified below be the subject of international preliminary examination according to the Patent Cooperation Treaty and hereby elects all eligible States (except where otherwise indicated).

For International Preliminary Examining Authority use only

|  |   |  |  |
|--|---|--|--|
| Identification of IPEA   |   | Date of receipt of DEMAND  |  |
| Box No. I IDENTIFICATION OF THE INTERNATIONAL APPLICATION  |   | Applicant's or agent's file reference<br>FINE25(P) ✓                         |  |
| International application No.<br>PCT/KR99/00797 ✓  | International filing date (day/month/year)<br>21 December 1999 (21. 12. 99) ✓ | (Earliest) Priority date (day/month/year)<br>22 December 1998 (22. 12. 98) ✓ |  |
| Title of invention<br>Solid Electrolytes Using Absorbent and Methods For Preparing Them ✓  |   |  |  |
| Box No. II APPLICANT(S)  |   |  |  |
| Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)<br>FINECELL Co., Ltd. ✓<br>Room No. Ka-Dong 407, Factory Apartment<br>150 Yatap-Dong, Pundang-Gu, Sungnam-City<br>Kyungki-Do 463-070, Republic of Korea ✓ |   | Telephone No.<br>82-342-704-4546   |  |
|  |   | Facsimile No.<br>82-342-781-4540   |  |
|  |   | Teleprinter No.  |  |
| State (that is, country) of nationality: KR  |   | State (that is, country) of residence: KR                                    |  |
| Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)<br>JANG, Dong Hun ✓<br>8-403, Hanyang Apt.<br>388-33 Ssangmun-Dong<br>Dobong-Gu, Seoul<br>132-033, Republic of Korea                                      |   |  |  |
| State (that is, country) of nationality: KR  |   | State (that is, country) of residence: KR                                    |  |
| Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)<br>KIM, Sa Heum ✓<br>138-1202 Hansung Mokhwa Apt.<br>880 Keumjung-Dong, Kunpo-City<br>Kyungki-Do 435-050<br>Republic of Korea                             |   |  |  |
| State (that is, country) of nationality: KR  |   | State (that is, country) of residence: KR                                    |  |
| <input checked="" type="checkbox"/> Further applicants are indicated on a continuation sheet.  |   |  |  |

**THIS PAGE BLANK (USPTO)**

## Continuation of Box No. II APPLICANT(S)

*If none of the following sub-boxes is used, this sheet should not be included in the demand.*

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

KIM, Han Jun ✓  
 231-25 Eungan-Dong, Eunpyoung-Gu  
 Seoul 122-012  
 Republic of Korea

State (that is, country) of nationality:

KR

State (that is, country) of residence:

KR

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

OH, Seung Mo ✓  
 603-201 Mokryun DooSan Apt., 1054-6  
 Pungye 5-Dong, Tongan-ku, Ahanyang-City  
 Kyungki-Do 431-085  
 Republic of Korea

State (that is, country) of nationality:

KR

State (that is, country) of residence:

KR

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

State (that is, country) of nationality:

State (that is, country) of residence:

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

State (that is, country) of nationality:

State (that is, country) of residence:



Further applicants are indicated on another continuation sheet.

**THIS PAGE BLANK (USPTO)**

**Box No. III AGENT OR COMMON REPRESENTATIVE: OR ADDRESS FOR CORRESPONDENCE**The following person is ☒ agent ☐ common representativeand ☒ has been appointed earlier and represents the applicant(s) also for international preliminary examination.☐ is hereby appointed and any earlier appointment of (an) agent(s)/common representative is hereby revoked.☐ is hereby appointed, specifically for the procedure before the International Preliminary Examining Authority, in addition to the agent(s)/common representative appointed earlier.Name and address: *(Family name followed by given name for a legal entity, full official designation. The address must include postal code and name of country.)*SOHN, Chang Kyu; BAEK, Duk Yeul; LEE, Tae Hee  
17th Floor, Marine Center Main Bldg., 118 Namdaemun-ro 2 ka  
Chung-gu, Seoul 100-770  
Republic of Korea

Telephone No.

82-2-772-4000

Facsimile No.:

82-2-772-4001

Teleprinter No.:

☐ Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.**Box No. IV BASIS FOR INTERNATIONAL PRELIMINARY EXAMINATION****Statement concerning amendments:\***

1. The applicant wishes the international preliminary examination to start on the basis of:

☐ the international application as originally filedthe description ☒ as originally filed☐ as amended under Article 34the claims ☒ as originally filed☐ as amended under Article 19 (together with any accompanying statement)☐ as amended under Article 34the drawings ☐ as originally filed☒ as amended under Article 342. ☐ The applicant wishes any amendment to the claims under Article 19 to be considered as reversed.3. ☐ The applicant wishes the start of the international preliminary examination to be postponed until the expiration of 20 months from the priority date unless the International Preliminary Examining Authority receives a copy of any amendments made under Article 19 or a notice from the applicant that he does not wish to make such amendments (Rule 69.1(d)). *(This check-box may be marked only where the time limit under Article 19 has not yet expired.)*

\* Where no check-box is marked, international preliminary examination will start on the basis of the international application as originally filed or, where a copy of amendments to the claims under Article 19 and/or amendments of the international application under Article 34 are received by the International Preliminary Examining Authority before it has begun to draw up a written opinion or the international preliminary examination report, as so amended.

Language for the purposes of international preliminary examination: English☐ which is the language in which the international application was filed.☐ which is the language of a translation furnished for the purposes of international search.☒ which is the language of publication of the international application.☐ which is the language of the translation (to be) furnished for the purposes of international preliminary examination.**Box No. V ELECTION OF STATES**The applicant hereby elects all eligible States *(that is, all States which have been designated and which are bound by Chapter II of the PCT)*

excluding the following States which the applicant wishes not to elect:

**THIS PAGE BLANK (USPTO)**



## Box No. VI CHECK LIST

The demand is accompanied by the following elements, in the language referred to in Box No. IV, for the purposes of international preliminary examination:

- |  |              |
|--|--------------|
| 1. translation of international application                              | _____ sheets |
| 2. amendments under Article 34   | 2 / sheets   |
| 3. copy (or, where required, translation) of amendments under Article 19 | _____ sheets |
| 4. copy (or, where required, translation) of statement under Article 19  | _____ sheets |
| 5. letter  | _____ sheets |
| 6. other (specify)   | _____ sheets |

For International Preliminary Examining Authority use only

received not received

|                          |                          |
|--------------------------|--------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |

The demand is also accompanied by the item(s) marked below:

- |  |   |
|--|---|
| 1. <input checked="" type="checkbox"/> fee calculation sheet                             | 4. <input type="checkbox"/> statement explaining lack of signature                                  |
| 2. <input type="checkbox"/> separate signed power of attorney                            | 5. <input type="checkbox"/> nucleotide and or amino acid sequence listing in computer readable form |
| 3. <input type="checkbox"/> copy of general power of attorney: reference number, if any: | 6. <input type="checkbox"/> other (specify):  |

## Box No. VII SIGNATURE OF APPLICANT, AGENT OR COMMON REPRESENTATIVE

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the demand).

SOHN, Chang Kyu



BAEK, Duk Yeul



LEE, Tae Hee



For International Preliminary Examining Authority use only

1. Date of actual receipt of DEMAND:

2. Adjusted date of receipt of demand due to CORRECTIONS under Rule 60.1(b):

- |  |   |
|--|---|
| 3. <input type="checkbox"/> The date of receipt of the demand is AFTER the expiration of 19 months from the priority date and item 4 or 5, below, does not apply.                        | <input type="checkbox"/> The applicant has been informed accordingly. |
| 4. <input type="checkbox"/> The date of receipt of the demand is WITHIN the period of 19 months from the priority date as extended by virtue of Rule 80.5.                               |   |
| 5. <input type="checkbox"/> Although the date of receipt of the demand is after the expiration of 19 months from the priority date, the delay in arrival is EXCUSED pursuant to Rule 82. |   |

For International Bureau use only

Demand received from IPEA on:


**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |           |  |
|--|-----------|--|
| <b>(51) International Patent Classification <sup>7</sup>:</b><br><b>H01M 10/36</b>   | <b>A1</b> | <b>(11) International Publication Number:</b> <b>WO 00/38262</b><br><b>(43) International Publication Date:</b> 29 June 2000 (29.06.00)  |
| <b>(21) International Application Number:</b> PCT/KR99/00797<br><b>(22) International Filing Date:</b> 21 December 1999 (21.12.99)<br><b>(30) Priority Data:</b><br>1998/57030 22 December 1998 (22.12.98) KR<br><b>(71) Applicant (for all designated States except US):</b> FINECELL CO., LTD. [KR/KR]; Room No. Ka-Dong 407, Factory Apt., 150 Yatap-Dong, Pundang-Gu, Sungnam-City, Kyungki-Do 463-070 (KR).<br><b>(71)(72) Applicants and Inventors:</b> JANG, Dong, Hun [KR/KR]; 8-403 Hanyang Apt., 388-33 Ssangmun-Dong, Dobang-Gu, Seoul 132-033 (KR). KIM, Sa, Heum [KR/KR]; 138-1202 Hansung Mokhwa Apt., 880 Keumjung-Dong, Kunpo-City, Kyungki-Do 435-050 (KR). KIM, Han, Jun [KR/KR]; 231-25 Eungam-Dong, Eunpyoung-Gu, Seoul 122-012 (KR).<br><b>(72) Inventor; and</b><br><b>(75) Inventor/Applicant (for US only):</b> OH, Seung, Mo [KR/KR]; 603-201 Mokryun DooSan Apt., 1054-6 Pumgye 5-Dong, Tongan-Ku, Ahanyang-City, Kyungki-Do 431-085 (KR). |           | <b>(74) Agents:</b> SOHN, Chang, Kyu et al.; Marine Center Main Building, 17th Floor, 118 Namdaemun-ro 2-ka, Chung-ku, Seoul 100-770 (KR).<br><b>(81) Designated States:</b> CN, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).<br><b>Published</b><br><i>With international search report.</i><br><i>In English translation (filed in Korean).</i> |

**(54) Title:** SOLID ELECTROLYTES USING ABSORBENT AND METHODS FOR PREPARING THEM

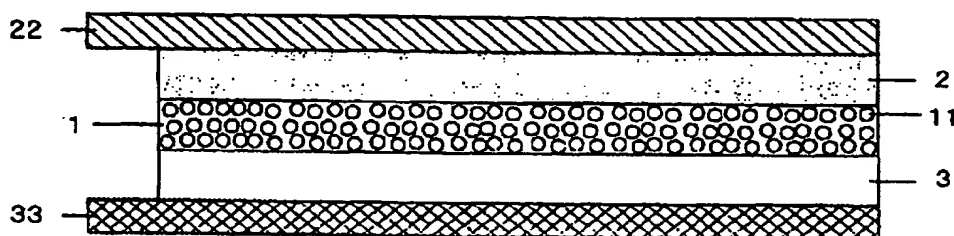**(57) Abstract**

The present invention relates to a solid electrolyte having conductivity to lithium ion by providing spaces for liquid component and lithium salts to be absorbed by way of introducing an absorbent to the inside of an electrolyte film, a process for preparing the same and a rechargeable lithium cell using the same. As the absorbent, polymers or inorganic materials having not more than 40  $\mu\text{m}$  of particle size can be used. As the polymer binder, any binder of which solubility against the liquid electrolyte is small can be used. The solid electrolyte according to the present invention has the ionic conductivity of more than approximately  $10^{-4}$  S/cm at room temperature. The cell is fabricated from the solid electrolyte together with electrodes by lamination or pressing methods. And, the liquid electrolyte, which is decomposed by moisture, is introduced to a cell just before packaging. Therefore, the solid electrolyte according to the present invention is not affected by the humidity and temperature conditions during the manufacturing of the electrolyte film. In addition, the solid electrolyte according to the present invention has high mechanical strength and little reactivity to lithium metal, and thus is suitable as an electrolyte for rechargeable lithium cells.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakstan                                | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

**SOLID ELECTROLYTES USING ABSORBENT**  
**AND METHODS FOR PREPARING THEM**

5

**Technical Field**

The present invention relates to an electrolyte film usable in rechargeable cells. More particularly, it relates to a provision of  
10 pathways for ions mobile between a cathode and an anode during repeated charge and discharge of rechargeable cells by introducing liquid components and lithium salts (hereinafter, both are referred to as “liquid electrolytes”) to an electrolyte film containing an absorbent.

15 Electrochemical cells include three essential components, i.e., cathode, anode and electrolyte. Examples of materials for said anode are typically compounds in which lithium metal or lithium ions can be intercalated, preferably carbon and polymer materials. Examples of materials for said cathode are typically materials in which lithium ions  
20 can be intercalated. For example, oxide compounds or polymer materials such as lithium cobalt oxide ( $\text{Li}_x\text{CoO}_2$ ), lithium nickel oxide ( $\text{Li}_x\text{NiO}_2$ ), lithium nickel cobalt oxide ( $\text{Li}_x\text{Ni}_y\text{Co}_{1-y}\text{O}_2$ ), spinel type lithium manganese oxide ( $\text{Li}_x\text{Mn}_2\text{O}_4$ ) and manganese dioxide ( $\text{MnO}_2$ ) can be used. The introduction of a liquid electrolyte to said electrolyte  
25 film can lead to the formation of an ion conductive matrix.

### Background Art

Electrochemical cells using polymer electrolytes have some  
5 advantages over ones using liquid electrolytes in that i) they have less  
leakage risk of liquid; ii) they have excellent electrochemical stability,  
which makes it possible to manufacture various types of cells; and iii)  
they make the automation of the manufacturing process easy.

10 Since the fact that polymers such as polyoxyethylene may have  
metal ion conductivity in the case that they contain polar heterologous  
atoms capable of electric interaction with metal ions was found,  
research on ion conductive polymers, i.e., polymer electrolytes has  
been actively conducted. However, since pure polymers such as  
15 polyoxyethylene have very low ionic conductivity of  $10^{-8}$  S/cm or so at  
room temperature, they have a demerit in that they should be  
approached to the temperature of approximately  $100^{\circ}\text{C}$  in order to  
show ionic conductivity of approximately  $10^{-4}$  S/cm applicable to  
electrochemical cells. For this reason, the main stream of the research  
20 on polymer electrolytes was concentrated on the improvement of  
conductivity.

As the fact that the conduction of ion in polymer electrolytes  
requires movement of polymer chains was found, attempts to improve  
25 conductivity of ions have been carried out in a direction of increasing  
the flexibility of polymer chains. Blonsky *et al* proposed a method for  
manufacturing an electrolyte having increased conductivity of  $10^{-5}$

S/cm by introducing phosphazene linkages to the main chain of the polymers (*J. Am. Chem. Soc.*, 106, 6854 (1984)). However, said electrolyte has lower conductivity and poor mechanical strength.

5        Alternatively, in order to decrease the crystallinity of polymers, various attempts such as modifying the structure of polymers or adding inorganic materials to polymers have been conducted. However, pure polymer electrolytes consisting of polymers and metal salts (not containing liquid electrolytes) still do not have sufficient conductivity.

10        On the contrary, gel-type electrolytes disclosed in US Patent 5,219,679 contain liquid electrolytes in their polymer backbones, and thus demonstrate conductivity close to that of liquid electrolytes while having properties of polymers in their mechanical properties,  
15        suggesting the possibility of commercialization to rechargeable battery. Namely, the electrochemical cell of said patent doesn't need a particular activation step of adding a liquid electrolyte, but contains some amount of liquid electrolytes which were incorporated during the manufacture of the polymer electrolytes (a mixture of polymer solution  
20        and liquid electrolyte was subjected to casting). However, the electrolytes in the US Patent No. 5,219,679 have problems in that they contain polymers such as polyacrylonitrile which are reactive to lithium metal, and thus reaction products between electrolytes and lithium electrode come to be accumulated during the storage and use period of  
25        the cell, resulting in a constant increase in interfacial resistance.

Meanwhile, Scrosati *et al* manufactured gel-type polymer electrolytes using polymethylmethacrylate having low reactivity with lithium metal (*Electrochim. Acta*, 140, 991 (1995)). These electrolytes, which use polymethylmethacrylate as a polymer component, have little  
5 reactivity with the surface of lithium, and thus have a merit in that the resistance increase phenomenon on the surface of electrode during the storage is insignificant. However, they also have demerits in that they have poor mechanical strength and thus the content of the polymers should be increased to accomplish strength sufficient to form a film,  
10 which in turn decreases the conductivity down to  $10^{-4}$  S/cm. In addition, since the gel-type electrolytes contain a large amount of liquid components, it is inevitable that the evaporation of the liquid components on the surface of the electrolytes will occur. For this reason, there have been some risks of causing composition changes due  
15 to the loss of liquid components during the storage, which leads to the decrease in conductivity. In addition, this method has a demerit of necessitating a dehumidifying atmosphere wherein moisture is removed to the utmost since lithium salts contained in the liquid electrolytes react and decompose with moisture in the air.

20

US Patent No. 5,296,318 and 5,418,091 proposed a hybrid polymer electrolyte system to compensate for the said problems. This hybrid polymer electrolyte can minimize the moisture effect on the process of manufacturing electrolytes by adding the liquid electrolytes  
25 susceptible to the effect of moisture prior to the packaging of battery, while taking advantage of the merits of gel-type polymer electrolytes (the gel-type polymer electrolytes contain a large amount of liquid



electrolytes and thus the conduction of lithium ion proceeds via liquid phase, thereby having similar conductivity to that of liquid electrolytes). However, since the liquid electrolytes are added after electrolyte film is prepared, it is necessary for the inside of the electrolyte film to have sites capable of absorbing liquid components therein or driving force making the liquid component possible to be penetrated thereinto. To this end, dibutyl phthalate is added as a plasticizer in the step of preparing electrolyte film, and after the assembly of cell is complete, the plasticizer is extracted by the use of an organic solvent such as alcohol or ether to form sites for liquid component being absorbed. However, due to the procedure of extracting dibutyl phthalate utilizing a chemical reaction, the methods have fatal demerits that the reproducibility is low, the manufacturing yield is reduced, and the automation for mass production is difficult.

### **Disclosure of Invention**

The present invention aims to solve the above-mentioned problems of said prior art at a stroke by adding an absorbent capable of absorbing liquid electrolytes to a polymer matrix to form a solid electrolyte film, and after the assembly of the battery, introducing a liquid electrolyte to the activation procedure of the battery.

The present invention also aims to develop rechargeable cells having excellent performances by the use of such solid electrolytes.

The term "electrolyte film" used in the specification refers to an electrolyte film that is dried condition and does not contain any liquid electrolytes. The term "solid electrolytes" used in the specification means said electrolyte film having ionic conductivity by incorporating liquid electrolytes thereto. Although the solid electrolytes are not in a complete solid state since they contain liquid electrolytes, they are called "solid electrolytes" in order to be distinguished from the liquid electrolytes and because the basic backbone of solid electrolytes starts from the electrolyte film at a solid state. In addition, the term "absorbent" used in the specification means materials capable of absorbing liquid electrolytes or of increasing the ability of the solid electrolytes absorbing liquid electrolytes.

The process for assembling batteries refers to binding a cathode and an anode, which are separately prepared, with an interposed electrolyte film in the manner of laminating, pressing or winding. When the electrolyte film is prepared by one of the said methods, liquid electrolytes are added after the assembly of battery, which can minimize the restriction on dehumidifying atmosphere in the process. Furthermore, according to the present method, the sites capable of absorbing liquid electrolytes are already formed in the course of manufacturing the electrolyte film and thus there is no need for the procedure of extracting a plasticizer. Therefore, the method has some advantages in that it simplifies the process, which not only reduces the production cost but also makes the automation process easy and improves the yield.

The solid electrolytes according to the present invention comprise an absorbent capable of absorbing liquid electrolytes, polymer binders and ion conductive liquid electrolytes. The solid electrolytes according to the present invention have lithium ionic conductivity of more than  $10^{-4}$  S/cm at room temperature.

Examples of absorbents capable of absorbing liquids can be largely divided into absorbents capable of absorbing water and absorbents capable of absorbing oil. Absorbents having excellent water absorption ability can be mostly used in diapers or sanitary napkins. Oil absorbents can be used to remove petroleum leaked from ocean or factories or to remove organic solvents from laboratories. The absorbents used in the present invention are porous polymers or inorganic materials. Said porous polymers are polypropylene or polyethylene to which porosity is introduced by means of net type polymer wherein bulky functional groups are introduced to branched chains or by means of adjusting the parameters of the process according to the present invention. Natural polymers such as pulp, cellulose and cork may also be used.

20

As absorbents according to the present invention, any materials in the form of powder that are capable of increasing water absorption ability of liquid electrolytes can be used. Preferably, it is possible to use polymer particles, mineral particles, mesoporous molecular sieves and commercially available absorbent particles. More preferably, it is further possible to use an absorbent selected from the group consisting of synthetic/natural polymer particles such as polyethylene particles,

polypropylene particles, polystyrene particles, polyurethane particles, pulp, cellulose particles, cork particles and wood powder; mineral particles having phyllosilicate structures such as clay, paragonite, montmorillonite and mica; synthetic oxide particles such as zeolite, porous silica and porous alumina; and mesoporous molecular sieves such as MCM-41 and MCM-48 made of oxide such as silica/polymer substance and having a pore diameter in 2 to 30 nm (manufactured by Mobil company); or a mixture of one or two or more selected from the group consisting of commercially available absorbents such as Absorbent W Product (manufactured by Absorption Corp.), Oclansorb (manufactured by Hi Point Industries), PP Spillow spill control (manufactured by Aldrich company) and Leak-Sorb spill absorbent (manufactured by Aldrich company). The absorbent may be used in the form of a mixture wherein two or more absorbents selected from the above mentioned absorbents are combined.

As absorbents in the present invention, inorganic materials such as minerals are more preferable than organic materials such as polymers.

Inorganic absorbents such as minerals have better mechanical, thermal and electrochemical stability as compared to organic absorbents such as porous polymers, and thus the performance of the rechargeable cells utilizing inorganic absorbents is better than that of the rechargeable cells utilizing organic absorbents. Namely, it was found that when the cells are fabricated by assembling a cathode and an anode by means of pressing or lamination method, the organic

absorbents differ from the electrolyte films or polymer binders of composite electrodes in their mechanical and thermal behaviors, and thus the rechargeable cells utilizing these organic absorbents show significant reduction in their discharge capacity during repeated charge and discharge as compared to the rechargeable cells utilizing inorganic absorbents. For example, absorbents consisting of organic materials such as polymers with low melting points or deteriorating mechanical strength may lose their absorption ability in the course of pressing or lamination procedures. In other words, the use of organic absorbents such as polymers may be beneficial to the performance of electrolyte films or solid electrolytes themselves, but it may be very difficult to maintain their original performance when electrochemical cells are fabricated by means of the pressing or lamination method.

In addition, as explained above, since the ionic conductivity in general polymer electrolytes is directly affected by the movement of polymer chains, the effect of temperature on ionic conductivity becomes significant. Particularly, at low temperatures, the movement of polymer chains is weakened, which significantly reduces the ionic conductivity, thereby resulting in severe deterioration in the performance of the cells. However, the use of inorganic absorbents increases the ionic conductivity. Moreover, if a large amount of inorganic absorbent, which is less affected by temperature, is used, the effect of temperature becomes less unlike the properties of general polymer electrolytes. As a large amount of inorganic absorbent is contained in electrolytes, the electrolytes have some merits in that the resistance against ignition or explosion is improved as compared to the

electrolytes containing a large amount of organic material such as polymers.

Accordingly, it can be confirmed that it is preferable to use  
5 inorganic absorbents rather than use organic absorbents in the constitution of the electrolyte film of rechargeable cells.

The amount of absorbents added is 30 to 95 % by weight and preferably, 50 to 90 % by weight based on the weight of the dried state  
10 electrolyte film that does not contain liquid electrolyte. If the added amount exceeds 95 % by weight, the mechanical strength of the electrolyte film formed falls. If the amount is not more than 30 % by weight, the ability to absorb liquid electrolyte decreases. The particle size of absorbents is preferably not more than 40  $\mu\text{m}$ , more preferably,  
15 not more than 20  $\mu\text{m}$  so as not to decrease the mechanical strength and the uniformity of the electrolyte film.

As polymer binders, most common polymers can be used. Among them, it is preferred to use a mixture of one or two or more  
20 polymers selected from the group consisting of copolymers of polyvinylidene fluoride, vinylidene fluoride and hexafluoropropylene, copolymers of vinylidene fluoride and maleic anhydride, polyvinylchloride, polymethylmethacrylate, polymethacrylate, cellulose triacetate, polyurethane, polysulfone, polyether, polyolefine  
25 such as polyethylene or polypropylene, polyethylene oxide, polyisobutylene, polybutyldiene, polyvinylalcohol, polyacrylonitrile, polyimide, polyvinyl formal, acrylonitrilebutyldiene rubber,

ethylene-propylene-diene-monomer, tetra(ethylene glycol)diacrylate, polydimethylsiloxane, polycarbonate and polysilicon, or copolymers thereof.

5       As solvents for dissolving polymer binders, a mixture of one or two or more solvents selected from the group consisting of N-methylpyrrolidinone, dimethylformamide, dimethylacetamide, tetrahydrofuran, acetonitrile, cyclohexanone, chloroform, dichloromethane, hexamethylphosphoramide, dimehtylsulfoxide,  
10       acetone and dioxane can be used.

      The liquid electrolytes, which are to be absorbed in electrolyte film containing absorbents, can be prepared by dissolving lithium salt in an organic solvent. In the present invention, the absorption of the  
15       liquid electrolytes into electrolyte film is defined as "activation".

      It is preferred that said organic solvents have high polarity and no reactivity to lithium metal so as to improve the degree of dissociation of ions by raising the polarity of electrolyte and to  
20       facilitate ion conduction by lowering local viscosity around ions. Examples of such organic solvents include ethylene carbonate, propylene carbonate, dimethylcarbonate, diethylcarbonate, ethylmethylcarbonate,  $\gamma$ -butyrolactone, dimethylsulfoxide, 1,3-dioxane, tetrahydrofuran, 2-methyltetrahydrofuran, sulfolane, N,N-  
25       dimethylformamide, diglyme, triglyme and tetraglyme. In particular, it is preferred that the organic solvent is used in the form of mixed

solutions of two or more solvents consisting of high viscosity solvents and low viscosity solvents.

Said lithium salt is preferred to have low lattice energy and a high degree of dissociation. Examples of such lithium salt include mixtures of one or two or more selected from the group consisting of  $\text{LiClO}_4$ ,  $\text{LiBF}_4$ ,  $\text{LiPF}_6$ ,  $\text{LiAsF}_6$ ,  $\text{LiSCN}$ ,  $\text{LiCF}_3\text{SO}_3$ ,  $\text{LiN}(\text{CF}_3\text{SO}_2)_2$  and  $\text{LiC}(\text{CF}_3\text{SO}_2)_3$ . The concentration of the lithium salt is preferably 0.5M to 2M.

10

The liquid electrolyte can be added in an amount of 30 to 90 % by weight, preferably 40 to 85 % by weight, based on the total amount of electrolytes including the liquid electrolyte.

15

The solid electrolyte according to the present invention is characterized by the facts that it is easy to prepare when compared to prior polymer electrolytes; that it has higher ionic conductivity because the conduction of lithium ions proceeds via liquid phase; and that it is not affected by moisture or temperature until it absorbs the liquid electrolyte or it is activated.

20

The present invention also relates to a method for the preparation of the solid electrolyte.

25

The solid electrolyte according to the present invention can be prepared by four steps, i.e., mixing an absorbent with a polymer binder, dissolution of the resulting mixture, casting (and drying) and activation.



By passing through said mixing, dissolution and casting (and drying) steps, an electrolyte film in a dried and solid state can be obtained, which is then subjected to activation step by absorbing the liquid electrolyte.

5

Namely, a mixture of the absorbent and the polymer binder is dissolved in a solvent for the polymer binder and then the resulting solution is molded into a film form and dried to form an electrolyte film with thickness of 10 to 200  $\mu\text{m}$ . To the electrolyte film in a dried  
10 state an ion conductive liquid electrolyte to be absorbed is introduced, resulting in a solid electrolyte according to the present invention.

In the following, the method for preparing the solid electrolyte is explained in greater detail.

15

First of all, an absorbent in powder form (particle size of not more than 40  $\mu\text{m}$ ) and a polymer binder are dry mixed in a closed container.

Both the absorbent and the polymer binder are dissolved in a  
20 solvent for the polymer binder. The solid content of said mixed solution is preferably 5 to 50 % by weight based on the total weight of the solution. If the content is less than 5 % by weight, the mechanical strength of the electrolyte film falls and if the content is more than 50  
25 % by weight, the polymer binder cannot be dissolved sufficiently or the viscosity of the mixed solution becomes large, which is problematic.

In order to facilitate the dissolution of the polymer binder and to avoid the agglomeration between absorbent, a magnetic stirrer, a mechanical stirrer, a planetary mixer or a high-speed disperser can be adopted to stir the mixed solution. While stirring, an ultrasonic stirrer  
5 may be used to prevent the absorbent from agglomerating or foaming in the middle of mixing. In addition, if desired, the mixed solution may be subjected to defoaming and filtration steps.

After the polymer binder is completely dissolved and uniformly  
10 mixed with the absorbent, the resulting mixture is molded in the form of film with a regular thickness. For example, the mixed solution may be poured on a flat glass plate or a Teflon plate and then be subjected to casting so that the resulting products have a regular thickness. Alternatively, the mixed solution may be extracted from a die with a  
15 regular space and then coated onto a substrate made of polymer film. Various other application methods can be selected. It is preferred that the thickness of the film be controlled in the range of 10 to 200  $\mu\text{m}$ . If the thickness of the film is not more than 10  $\mu\text{m}$ , the mechanical strength will weaken, and if the thickness of the film exceeds 200  $\mu\text{m}$ ,  
20 the ionic conductivity decreases, which is not preferable.

After completely drying the resulting film, the liquid electrolyte is introduced thereto.

25 The present invention is directed to rechargeable cells, particularly to lithium rechargeable cells wherein said solid electrolyte is used as an electrolyte.

In one embodiment of the method for the production of rechargeable cells by the use of the solid electrolyte according to the present invention, a cell can be constructed by bonding a cathode and an anode, interposed with the electrolyte film prepared from the above-mentioned procedure. The electrolyte film contains the absorbent powder therein; the cathode is electrically connected to a cathode current collector; and the anode is electrically connected to an anode current collector. Thus the constructed assembly is activated to be able to absorb the liquid electrolyte, thereby obtaining electrochemical cell which is ready to operate.

Fig. 1 illustrates a cross sectional view of the rechargeable cell in which the solid electrolyte according to the present invention is used. The solid electrolyte (1) contains the absorbent powder (11) and the liquid electrolyte, which is absorbed during the activation step. The cathode (2) is electrically connected to a cathode current collector (22) and the anode (3) is electrically connected to an anode current collector (33), respectively.

20

The procedures for the preparation of the cathode or anode are as follows. The cathode or anode consists of a current collector and an active material layer. The active material layer comprises of active materials, conducting materials and binder, etc. Besides, various additives may be introduced in order to improve the performance of cells. The current collectors, conducting materials, binders and

additives, which are contained in the cathode or anode, may be identical or different, depending on desired intentions.

The current collectors provide mobile pathways for electrons, which are generated in the oxidation/reduction reaction, taking place in the cathode or the anode. As current collectors, generally grids, foils, punching foils and etching foils, etc., may be used, depending on the performance or manufacturing processes of the cell. The use of grids can increase the filling rate of the active material, but it may complicate the manufacturing process. The use of foils can improve the performance of the cell and simplify the manufacturing process, but it may deteriorate the filling rate of the active materials. Copper, aluminum, nickel, titanium, stainless steel, carbon, etc., can be used as current collectors. Generally, aluminum is used for the cathode and copper is used for the anode.

The active materials are the most crucial component of cells since they determine the performance of cells in view of the fact that the charge and discharge reaction (or oxidation/reduction reaction) of cells take place on these materials. Furthermore, the active materials possess the largest content in the active material layer. As cathode active materials, it is possible to use oxide compounds or sulfide of transition metals, organic compounds, polymer compounds, etc. Preferably, it is possible to use oxide compounds or polymer materials such as lithium cobalt oxide ( $\text{Li}_x\text{CoO}_2$ ), lithium nickel oxide ( $\text{Li}_x\text{NiO}_2$ ), lithium nickel cobalt oxide ( $\text{Li}_x\text{Ni}_y\text{Co}_{1-y}\text{O}_2$ ), spinel type lithium manganese oxide ( $\text{Li}_x\text{Mn}_2\text{O}_4$ ), manganese dioxide ( $\text{MnO}_2$ ), etc. As

anode active materials, alkali metals, alkali earth metals, carbon, oxide compounds or sulfide compound of transition metals, organic compounds and polymer compounds may be used, preferably carbon or polymer materials can be used. It is essential that the active materials  
5 should be chosen in accordance with the desired performance or use of electrochemical cells.

The conducting materials refer to materials that are added to the cathode or anode in order to improve the electronic conductivity, and  
10 are generally carbon. Among them, conducting materials are preferably graphite, cokes, activated carbon and carbon black, more preferably graphite and carbon black. One or two or more of conducting materials selected from the above group can be used and there is no difference whether they are synthetic or natural materials. The conducting  
15 materials are added in an amount of 3 to 15 % by weight based on the total weight of the electrode materials. If the amount of the conducting materials added is not more than 3 % by weight, the electrical conductivity decreases, causing the problem of over potential. If the amount exceeds 15% by weight, the energy density per unit volume  
20 decreases and the side reaction due to the conducting materials become severe.

The binders refer to components to be added to increase the binding ability of the active materials and are generally polymer  
25 compounds. The polymer compounds that are used in the preparation of the solid electrolyte film may serve as binders. It is preferable to use binders, which are the same as polymers of the electrolyte film or have

miscibility. The binders may be added in an amount of 15 % by weight, based on the total weight of the electrode materials. If the amount of binders is less than required, the binding ability of the electrodes may decrease. If the amount of binders exceeds 15 % by weight, the processability and porosity of the electrodes decrease.

The additives refer to materials, which are added to improve the performance of cells or electrodes and can be chosen within a wide range in accordance with desired performances or use. The additives are added to improve the binding ability with composite electrode inside or current collectors, to induce the porosity or non-crystallinity of the composite electrode, to improve the dispersibility of the composite electrode constituting materials or the efficiency of the process for the manufacturing of the electrodes, to prohibit the overcharge/overdischarge of the active materials, to recombine or remove the side reaction products, or to improve the absorption ability of the liquid electrolytes. Generally, salts, organic/inorganic compounds, minerals and polymer compounds can be used as additives, and absorbents added to the electrolyte film can be chosen.

In the following, the rechargeable lithium cell according to the present invention will be explained in greater detail.

First, a mixture of an absorbent and a polymer binder is dissolved in a solvent for polymer binders to form a solution, which is made into a film and then the resulting film is dried to form an electrolyte film with a thickness of 10 to 200  $\mu\text{m}$ . The obtained

electrolyte film is assembled with a cathode and an anode prepared separately to form an electrochemical cell, to which a liquid electrolyte is absorbed to obtain the rechargeable lithium cell. The solid electrolyte should be subjected to an activation step absorbing the liquid electrolyte in order to have a sufficient ionic conductivity for being used. By passing through the activation step, the solid electrolyte comes to be workable as an electrochemical cell. In case that the solid electrolyte fails to pass through the activation step, the ionic conductivity at room temperature decreases drastically, which renders the solid electrolyte itself inappropriate as an electrolyte.

The process for the preparation of the cathode and/or anode to be assembled with said electrolyte film is as follows. Each mixture of the cathode or anode materials is kneaded to give slurry. The resulting slurry is molded to a thin film by means of casting, coating and screen printing and then the resulting thin film is combined with a current collector by means of pressing or lamination to form a cathode and/or an anode. Alternatively, the slurry may be directly coated on a current collector to form a cathode and/or an anode.

20

Onto the surface of the electrodes manufactured by the above-mentioned methods, a solid electrolyte slurry consisting of an absorbent, a polymer binder and a solvent may be directly applied to form a cell in which an electrolyte film is formed on the electrodes. Alternatively, one may constitute a cell by lamination or pressing the separately manufactured electrodes and electrolyte film. When a cell is constructed by the former method, the binding ability between the

25

electrodes and the electrolyte film may increase. However, it will be hard to adopt the former method when the electrodes and the electrolyte film do not correspond with each other, or when the electrodes or the electrolyte film are easy to pollute or lose their performance in the course of manufacturing process. In the latter method, although there is a demerit in that the binding ability between the electrodes and the electrolyte film is weak, there are much better merits in that it simplifies the quality control, process design and equipment used. Therefore, the latter method is preferred to the former one.

The electrolyte film prepared by the present invention contains an absorbent and thus has advantages in that it has higher mechanical strength as compared to pure electrolyte films or other electrolyte films containing gel type polymer electrolytes or plasticizers. Accordingly, because the electrolyte film of the present invention shows little change in its shape during the pressing or lamination procedure and has high reproducibility, it has merits in that it can be produced with a low failure rate and on a large scale. Namely, it can be stated that the electrolyte film prepared by the present invention has properties suitable for pressing or lamination methods, which are more advantageous in terms of quality control, process design and equipment used.

### **Brief Description of Drawings**



Figure 1 is a cross sectional view of the cell wherein the solid electrolyte according to the present invention is used.

Figure 2 shows graphs demonstrating the experimental results of linear sweep voltammetry to determine the electrochemical stability of the solid electrolyte according to the present invention.

Figure 3 shows a variation of discharge capacity of the cell in which the solid electrolyte containing an inorganic absorbent is used as compared to the cell in which polymer absorbent is used with repeated charge and discharge.

Drawing Reference Numerals:

|                      |                               |
|----------------------|-------------------------------|
| 1: solid electrolyte | 11: absorbent powder          |
| 2: cathode           | 22: cathode current collector |
| 3: anode             | 33: anode current collector   |

Best Mode for Carrying out the Invention

In the present invention, the solid electrolyte containing absorbents according to the present invention and the process for the preparation of cells by using said solid electrolyte are explained in detail. Firstly, the production of the solid electrolyte and the examination of performances were carried out. In addition, the solid electrolyte is assembled together with the cathode and anode to form a cell and then the procedure to examine the performance of the cell is described. However, the present invention is not restricted to those

examples and various modifications are possible within the scope of the invention.

### Example 1

5 An absorbent and a binder powder were introduced to a 20 ml vial and then dry mixed for approximately 5 minutes with a magnetic stirrer. To the resulting mixture 4 ml of N-methyl pyrrolidinone was added and then continuously stirred until the binder was completely  
10 dissolved. In order to prohibit the absorbent particles from agglomerating with each other, the resulting solution was further subjected to ultrasonic stirring for 30 minutes while stirring. The mixed solution thus prepared was coated onto a glass plate in thickness of 100  $\mu\text{m}$ , dried at room temperature for 2 hours or so and then further  
15 dried for 6 hours in a vacuum drier. The temperature in the vacuum drier was controlled to approximately 50°C. The electrolyte film thus prepared was soaked in a liquid electrolyte solution for approximately 10 minutes. After the liquid electrolyte was completely absorbed, the weight change was determined. The ionic conductivity was also  
20 determined by the use of an alternate current impedance method.

Table 1 summarizes the kinds of absorbents and binders, the properties of the solid electrolyte in accordance with its content and conductivity. In order to compare the ability of electrolyte film  
25 absorbing the liquid electrolyte, sorption capacity ( $\Delta_{ab}$ ) was defined as follows:

$$\Delta_{ab} = [\text{amount of the liquid electrolyte absorbed (mg)}] / [\text{weight of the electrolyte film (mg)}]$$

Table 1

| E<br>x. | Absorbents          |      | Binder         |      | Liquid<br>Electrolyte       | $\Delta_{ab}$ | Ionic<br>Conduc<br>tivity<br>mS/cm | Mechanical<br>strength |
|---------|---------------------|------|----------------|------|-----------------------------|---------------|------------------------------------|------------------------|
|         | Kind                | g    | Kind           | g    |                             |               |                                    |                        |
| a       | Paragonite          | 0.13 | PVdF           | 0.28 | EC/PC 1M LiPF <sub>6</sub>  | 0.5           | 0.01                               | Very Good              |
| b       | Paragonite          | 0.17 | PVdF           | 0.26 | EC/PC 1M LiPF <sub>6</sub>  | 0.7           | 0.02                               | Very Good              |
| c       | Paragonite          | 0.72 | PVdF           | 0.24 | EC/PC 1M LiPF <sub>6</sub>  | 0.9           | 0.17                               | Very Good              |
| d       | Paragonite          | 1.06 | PVdF           | 0.26 | EC/PC 1M LiPF <sub>6</sub>  | 1.5           | 0.19                               | Good                   |
| e       | Paragonite          | 1.51 | PVdF           | 0.25 | EC/PC 1M LiPF <sub>6</sub>  | 2.2           | 0.39                               | Good                   |
| f       | Paragonite          | 2.00 | PVdF           | 0.26 | EC/PC 1M LiPF <sub>6</sub>  | 5.0           | 0.63                               | Good                   |
| g       | Paragonite          | 1.98 | PVdF           | 0.25 | EC/DMC 1M LiPF <sub>6</sub> | 5.5           | 0.75                               | Satisfactory           |
| h       | Zeolite             | 1.37 | PVdF           | 0.60 | EC/DMC 1M LiPF <sub>6</sub> | 4.7           | 0.68                               | Good                   |
| i       | Zeolite             | 1.50 | PVdF           | 0.38 | EC/DMC 1M LiPF <sub>6</sub> | 5.5           | 0.85                               | Good                   |
| j       | Zeolite             | 1.65 | PVdF           | 0.29 | EC/DMC 1M LiPF <sub>6</sub> | 5.8           | 0.91                               | Satisfactory           |
| k       | Montmoril<br>lonite | 1.34 | PVdF           | 0.58 | EC/DMC 1M LiPF <sub>6</sub> | 4.4           | 0.70                               | Good                   |
| l       | Montmoril<br>lonite | 1.50 | PVdF           | 0.38 | EC/DMC 1M LiPF <sub>6</sub> | 5.8           | 0.82                               | Good                   |
| m       | Silica              | 1.35 | PVdF           | 0.59 | EC/DMC 1M LiPF <sub>6</sub> | 5.6           | 0.75                               | Good                   |
| n       | Polypropyl<br>ene   | 1.35 | PVdF           | 0.60 | EC/DMC 1M LiPF <sub>6</sub> | 5.7           | 0.80                               | Good                   |
| o       | Wood<br>powder      | 1.35 | PVdF           | 0.60 | EC/DMC 1M LiPF <sub>6</sub> | 5.5           | 0.79                               | Good                   |
| p       | Paragonite          | 2.00 | P(VdF<br>-HFP) | 0.26 | EC/DMC 1M LiPF <sub>6</sub> | 5.1           | 0.76                               | Good                   |
| q       | Paragonite          | 1.95 | PAN            | 0.25 | EC/DMC 1M LiPF <sub>6</sub> | 5.0           | 0.74                               | Good                   |
| r       | Paragonite          | 2.00 | PU             | 0.26 | EC/DMC 1M LiPF <sub>6</sub> | 5.3           | 0.72                               | Good                   |
| s       | Paragonite          | 1.98 | PVC            | 0.25 | EC/DMC 1M LiPF <sub>6</sub> | 5.5           | 0.78                               | Good                   |
| t       | Paragonite          | 2.00 | P(VdF<br>-HFP) | 0.26 | EC/DMC 1M LiPF <sub>6</sub> | 5.4           | 0.75                               | Good                   |
| u       | Zeolite             | 2.00 | P(VdF<br>-HFP) | 0.26 | EC/DMC 1M LiPF <sub>6</sub> | 5.3           | 0.78                               | Good                   |
| v       | Zeolite             | 1.95 | PAN            | 0.25 | EC/DMC 1M LiPF <sub>6</sub> | 5.1           | 0.74                               | Satisfactory           |
| w       | Zeolite             | 2.00 | PU             | 0.26 | EC/DMC 1M LiPF <sub>6</sub> | 5.2           | 0.72                               | Good                   |
| x       | Zeolite             | 1.98 | PVC            | 0.25 | EC/DMC 1M LiPF <sub>6</sub> | 5.4           | 0.78                               | Good                   |
| y       | Zeolite             | 2.00 | P(VdF<br>-HFP) | 0.26 | EC/DMC 1M LiPF <sub>6</sub> | 5.3           | 0.75                               | Good                   |

### Example 2 (Comparative Example)

The same procedure as in Example 1-(f) was repeated to form an electrolyte film except that no absorbent was added in order to  
5 determine the effect of absorbents on the electrolyte film prepared. The electrolyte film prepared was transparent and had good mechanical strength. However, when the electrolyte film thus prepared was soaked in a liquid electrolyte solution at room temperature for 10 hours, the weight of the electrolyte film before and after the soaking was almost  
10 the same within measurement error. In addition, the ionic conductivity of the solid electrolyte thus prepared could not be measured by means of an alternate current impedance method.

### Example 3

15

In order to determine the electrochemical stability of the solid electrolyte containing absorbents, the linear sweep voltammetry method was carried out by the use of a stainless steel (#304) as an operating electrode and lithium metal as an opposite electrode and a  
20 standard electrode. The electrochemical voltage applied in the linear sweep voltammetry was from an open circuit voltage to 5.4 V (vs. Li/Li<sup>+</sup>). The scan rate of the linear sweep voltammetry was 10 mV/sec. The results of the linear sweep voltammetry measured on the solid electrolyte prepared by the methods of Example 1-(g), 1-(i) and 1-  
25 (l) are shown as A, B and C, respectively, in Fig. 2.

#### Example 4

In order to determine the performances of the cell using the solid electrolyte containing inorganic absorbent, an oxide compound cathode, a carbon anode and a solid electrolyte according to the present invention were assembled to fabricate cells, and then the charge and discharge test on thus fabricated cells was carried out. The fabricated cells were in a laminated form and were prepared by lamination of the cathode, anode and electrolyte film to form an assembly, to which a liquid electrolyte was absorbed. The constant current was applied with a rate charging the reversible capacity within 2 hours (C/2 rate) until the cell voltage became 4.2 V, and then the constant voltage of 4.2 V was applied again until the current decreased down to C/10 mA. Subsequently, the discharging current was applied with a rate discharging the voltage down to 2.5 V or 2.75 V within 2 hours (C/2 rate). The charge and discharge experiment was repeated and the change of discharge capacity with the charge and discharge was measured. The cell constitution and the test results are summarized in the following Table 2 and shown in Fig. 3. As listed in Table 2, the solid electrolyte refers to the conditions where a liquid electrolyte is absorbed into an electrolyte film.

Table 2

| Ex. | Cathode                          |                     |            |          | Anode           |                     |            | Solid Electrolyte | Fig.     |
|-----|----------------------------------|---------------------|------------|----------|-----------------|---------------------|------------|-------------------|----------|
|     | Active material                  | Conducting material | Binder     | Additive | Active material | Conducting material | Binder     |                   |          |
| z   | LiCoO <sub>2</sub>               | carbon black        | PVdF       | Zeolite  | graphite        | carbon black        | PVdF       | Ex. 1-(l)         | Fig. 3-D |
| aa  | LiCoO <sub>2</sub>               | carbon black        | PVdF       | Zeolite  | graphite        | carbon black        | PVdF       | Ex. 1-(j)         | Fig. 3-E |
| bb  | LiCoO <sub>2</sub>               | carbon black        | PVdF       | Zeolite  | graphite        | carbon black        | PVdF       | Ex. 1-(n)         | Fig. 3-F |
| cc  | LiCoO <sub>2</sub>               | carbon black        | PU         | Zeolite  | graphite        | carbon black        | PU         | Ex. 1-(r)         | Fig. 3-G |
| dd  | LiMn <sub>2</sub> O <sub>4</sub> | carbon black        | P(VdF-HFP) | Zeolite  | graphite        | carbon black        | P(VdF-HFP) | Ex. 1-(u)         | Fig. 3-H |

Fig.3 illustrates the discharge capacity with repeated charge and discharge of the cell obtained by the respective examples in comparison with the first discharge capacity. From the test results, it was confirmed that the use of the solid electrolytes containing inorganic absorbents (Examples 4-z, aa, cc, dd) shows much better cell performance than that of the solid electrolyte containing organic absorbents (polymer) (Example 4-bb). Namely, the solid electrolyte containing inorganic absorbent has a much better effect on the total cell performance (charge and discharge performance, etc.), although the electrolyte film or solid electrolyte itself does not show any significant differences in properties (ionic conductivity, mechanical strength, etc.).

### **Industrial Applicability**

15

As it can be understood from the above descriptions, the solid electrolytes containing absorbents according to the present invention are characterized by the following facts:

they have high mechanical strength, which makes them suitable to be made into thin films;

they have high ionic conductivity corresponding to that of the liquid electrolytes;

unlike general polymer electrolytes in gel type, they do not require any particular dehumidifying atmosphere since lithium salt, which is easily decomposed by a trace amount of moisture, is not introduced during the manufacturing of the electrolyte films;



they have a broad electrochemical potential window since the absorbent therein is electrochemically stable; and

they are of ease in automation for mass production due to the simple process for the production of the electrolyte.

5

In addition, it is possible to minimize the surface resistance between the electrolyte and electrodes since the binding ability with the cathode and anode is excellent and the volume change due to the introduction of the liquid electrolyte is little. The solid electrolytes containing inorganic absorbents also show superior mechanical, thermal and electrochemical stability to those of the solid electrolytes containing organic absorbents, thereby showing less decrease in their discharge capacity during the repeated charge and discharge, which makes it suitable for being used as an electrolyte for rechargeable lithium cells.

10  
15

**WHAT IS CLAIMED IS:**

1. A solid electrolyte for rechargeable cells, comprising:
  - 5 an absorbent in powder form having a particle size not more than 40  $\mu\text{m}$ , a polymer binder and an ion conductive liquid electrolyte, wherein said absorbent is added in an amount of 30 to 95 % by weight based on the total weight of the electrolyte film under the dried condition that no liquid electrolyte is contained therein;
  - 10 said ion conductive liquid electrolyte is added in an amount of 30 to 90 % by weight based on the total weight of the electrolyte including liquid electrolyte; and
  - the solid electrolyte has 10 to 200  $\mu\text{m}$  of thickness under the dried condition not containing liquid electrolyte.
- 15 2. A solid electrolyte for rechargeable cells according to Claim 1, said absorbent is a mixture of one or two or more selected from the group consisting of porous polymer particles such as polyethylene, polypropylene, polystyrene, polyurethane, pulp, cellulose, cork and  
20 wood powder; mineral particles such as clay, paragonite, montmorillonite and mica; synthetic oxide particles such as zeolite, porous silica and porous alumina; mesoporous molecular sieves having 2 to 30 nm of pore diameter made of oxides or polymers; and other commercially available absorbents;
- 25 said polymer binder is a mixture of one or two or more selected from the group consisting of copolymers of polyvinylidene fluoride, vinylidene fluoride and hexafluoropropylene, copolymers of vinylidene

fluoride and maleic anhydride, polyvinylchloride, polymethylmethacrylate, polymethacrylate, cellulose triacetate, polyurethane, polysulfone, polyether, polyethylene, polypropylene, polyethylene oxide, polyisobutylene, polybutylidene, polyvinylalcohol,  
5 polyacrylonitrile, polyimide, polyvinyl formal, acrylonitrilebutyldiene rubber, ethylene-propylene-diene-monomer, tetraethyleneglycol diacrylate, polydimethylsiloxane, polycarbonate and silicon polymer, or their copolymer;

said ion conductive liquid electrolyte is obtained by dissolving  
10 one or two or more lithium salts selected from the group consisting of  $\text{LiClO}_4$ ,  $\text{LiBF}_4$ ,  $\text{LiPF}_6$ ,  $\text{LiAsF}_6$ ,  $\text{LiSCN}$ ,  $\text{LiCF}_3\text{SO}_3$ ,  $\text{LiN}(\text{CF}_3\text{SO}_2)_2$  and  $\text{LiC}(\text{CF}_3\text{SO}_2)_3$  in a mixture of one or two or more organic solvents selected from the group consisting of ethylene carbonate, propylene carbonate, dimethylcarbonate, diethylcarbonate, ethylmethylcarbonate,  
15  $\gamma$ -butyrolactone, 1,3-dioxane, tetrahydrofuran, 2-methyltetrahydrofuran, dimethylsulfoxide, sulfolane, N,N-dimethylformamide, diglyme, triglyme and tetraglyme in a concentration of 0.5M to 2M.

20 3. A solid electrolyte for rechargeable cells according to Claim 2, in which said absorbent is a mixture of one or two or more selected from the group consisting of mineral particles, synthetic oxide particles and mesoporous molecular sieves.

25 4. A process for the preparation of the solid electrolyte for rechargeable cells according to any one of Claims 1 to 3, which comprises the steps of:

dissolving a mixture of an absorbent and a polymer binder in a solvent for the polymer binder,

making the resulting solution into a film and drying it to form an electrolyte film, and then

5       subjecting the resulting electrolyte film to absorb an ion conductive liquid electrolyte.

5.     A rechargeable lithium cell, which is obtained by the following steps:

10       dissolving a mixture of an absorbent and a polymer binder in a solvent for the polymer binder,

making the resulting solution into a film and drying it to form an electrolyte film,

15       assembling the resulting electrolyte film together with a cathode and an anode separately prepared to form a cell, and then

subjecting the resulting cell to absorb an ion conductive liquid electrolyte.

## DRAWINGS

Fig. 1



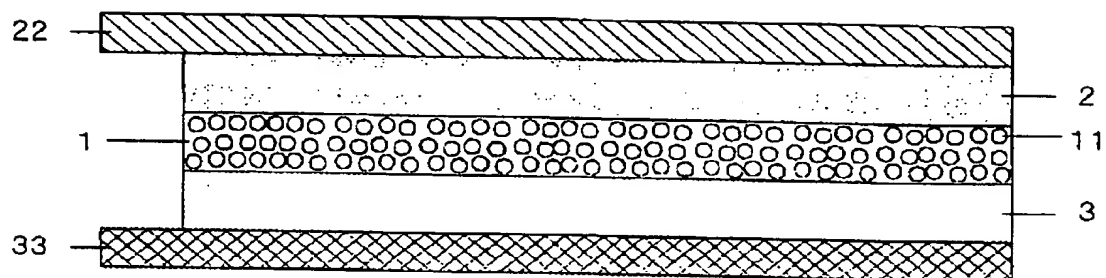


Fig. 2

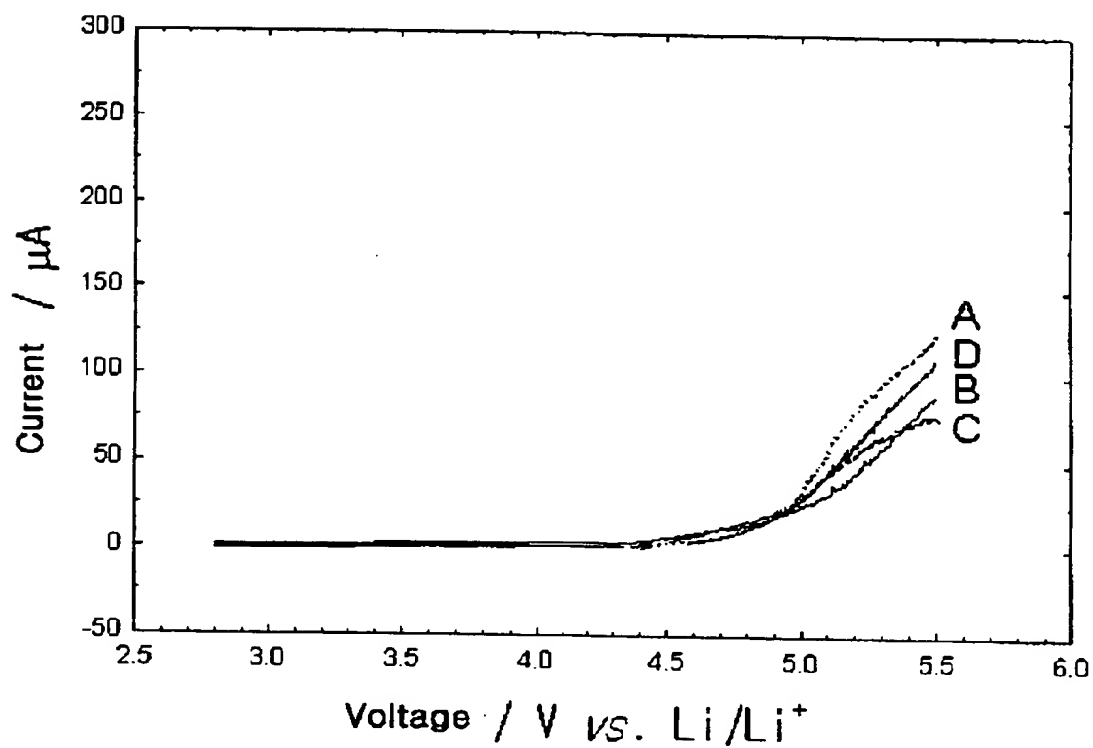

**THIS PAGE BLANK (USPTO)**

Fig. 3

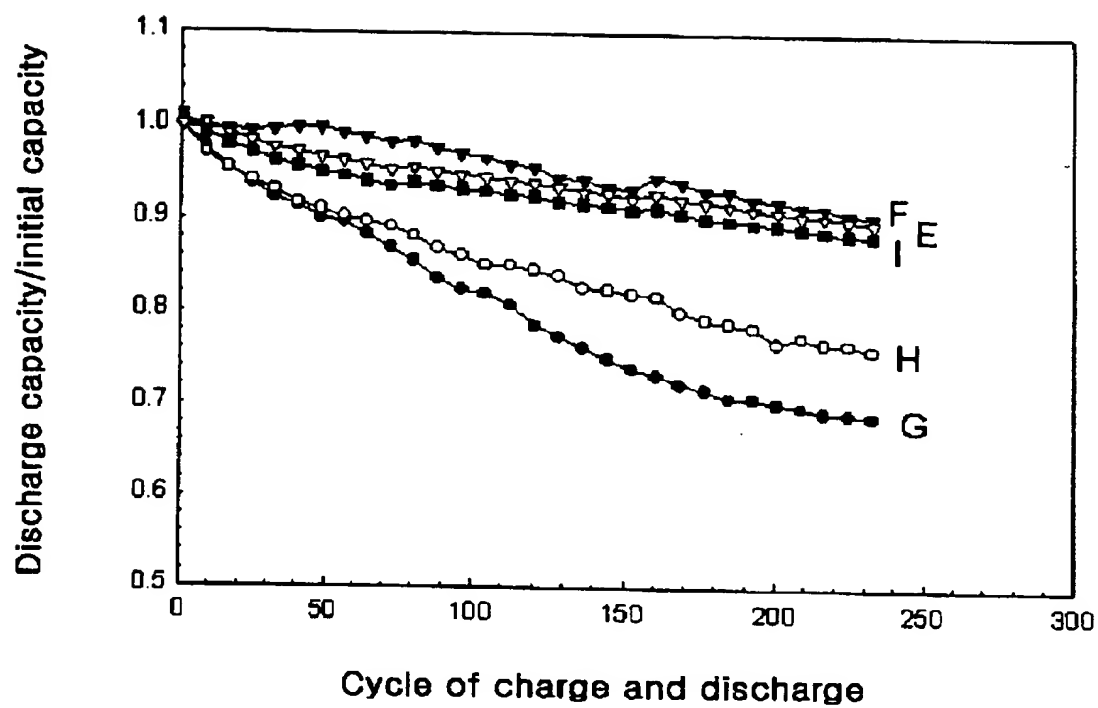

5

10

2/2

15

**THIS PAGE BLANK (USPTO)**



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR99/00797

## A. CLASSIFICATION OF SUBJECT MATTER

**IPC7 H01M 10/36**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

IEL(IEEE/IEE Electronic Library), Since 1988, solid <and> electrolyte <and> lithium

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|-----------|--|-----------------------|
| A         | US 5,079,109 A (TOSHIBA BATTERY CO), 7 January 1992,<br>See abstract   | 2                     |
| A         | YASUMASA NAKAJIMA, YUICHI AIHARA, SIRO KATO and KAZUO MURATA<br>'Development of Film-like Lithium Battery Using Solid Polymer Electrolyte'<br>In: Telecommunications Energy Conference, 1995. INTELEC '95., 17th International<br>Published: 1995, Page(s): 704 -709 | 1-5                   |

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 MARCH 2000 (30.03.2000)

Date of mailing of the international search report

31 MARCH 2000 (31.03.2000)

Name and mailing address of the ISA/KR

Korean Industrial Property Office  
Government Complex-Taejon, Dunsan-dong, So-ku, Taejon  
Metropolitan City 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KWON, Oh Bok

Telephone No. 82-42-481-5994



**THIS PAGE BLANK (USPTO)**